



Ultimate **Big Screen** Experience

Introducing Optoma screens

Optoma offer you an extremely wide range of high quality front projection screens, suitable for almost any situation. From small meeting rooms to large conference theatres and for the most demanding of home cinema applications, Optoma has a screen for you.

All Optoma screens are built to a high standard and are rigorously checked and tested throughout the production process to ensure the highest possible build quality and finish.

Our unrivalled understanding of both the market place and emerging technologies has allowed us to use our expertise to further expand our product offering to cater for every requirement, whilst still delivering great value. The screens are available in several styles including wall/ceiling mountable, manual pull-down and electric with In-Site I/R, and portable lift all in Matte White 1.0 gain.

The outside surface of our matte white screen incorporate PVC microdot technology to create the best possible surface reflection, whilst new advances in screen construction help keep our matte white screens flat and retain its shape and effectiveness over longer periods of time.

Optoma screens are available in a wide range of sizes and styles that will fit any home and lifestyle. The fabrics are designed to be fire, water, and mold resistant and are can be wiped clean, making them the ideal partner for your projector.

Manual pull down









4:3 screen range

| Model | DS-3084PWC | DS-3100PMG+ | DS-3120PMG+ |
|----------------------------------|---|---|---|
| Format | 4:3 | 4:3 | 4:3 |
| Gain | 1 | 1 | 1 |
| Screen material | Matte white | Matte white | Matte white |
| Viewing size (W x H) (mm) | 1710 x 1280 | 2030 x 1520 | 2340 x 1755 |
| Diagonal viewing (Inch) | 84 | 100 | 120 |
| Black border R & L (mm) | 40 | 50 | 47 |
| Black border bottom (mm) | 35 | 60 | 45 |
| Black border top (mm) | 80 | 80 | 80 |
| Weight (Net) (Kgs) | 8.96 | 11.13 | 13.6 |
| Case dimensions (W x D x H) (mm) | 1910 x 112 x 86 (including brackets) | 2250 x 112 x 86 (including brackets) | 2554 x 112 x 86 (including brackets) |

16:9 screen range

| Model | DS-9072PWC | DS-9084PMG+ | DS-9092PWC |
|----------------------------------|---|---|---|
| Format | 16:9 | 16:9 | 16:9 |
| Gain | 1 | 1 | 1 |
| Screen material | Matte white | Matte white | Matte white |
| Viewing size (W x H) (mm) | 1594 x 897 | 1860 x 1045 | 2030 x 1145 |
| Diagonal viewing (Inch) | 72 | 84 | 92 |
| Black border R & L (mm) | 50 | 50 | 50 |
| Black border bottom (mm) | 55 | 35 | 60 |
| Black border top (mm) | 300 | 300 | 300 |
| Weight (Net) (Kgs) | 8.96 | 9.92 | 11.3 |
| Case dimensions (W x D x H) (mm) | 1814 x 112 x 86 (including brackets) | 2080 x 112 x 86 (including brackets) | 2250 x 112 x 86 (including brackets) |

16:10 screen range


| Model | DS-1095PMG+ | DS-1109PMG+ | DS-1123PMG+ |
|--|-----------------|-----------------|------------------|
| Format | 16:10 | 16:10 | 16:10 |
| Gain | 1 | 1 | 1 |
| Screen material | Matte white | Matte white | Matte white |
| Viewing size (W x H) (mm) | 2030 x 1269 | 2340 x 1463 | 2656 x 1660 |
| Diagonal viewing (Inch) | 95 | 109 | 123 |
| Black border R & L (mm) | 50 | 47 | 50 |
| Black border bottom (mm) | 60 | 40 | 40 |
| Black border top (mm) | 300 | 300 | 300 |
| Weight (Net) (Kgs) | 11.3 | 13.38 | 20 |
| Case dimensions (W \times D \times H) (mm) | 2250 x 112 x 86 | 2554 x 112 x 86 | 2920 x 118 x 132 |

The best products can only be made with the best materials and the highest Selflock grade of screen fabrics. Optoma uses the most professionally made screen Pull down the screen and hold for 3 seconds, then release. The screen fabrics to reflect the truest, most vivid and dynamic images. will stay at the desired position.

PMG+ projection screens are popular because they are inexpensive and easy to operate. Optoma Manual Screens offer several outstanding features.

Controlled screen return


Optoma PMG+ Manual Screens feature Speed Reduction-Retraction. Simply pull down lightly to release the locking mechanism, let go and the screen will slowly return to the casing.





Optoma's matte white fabric is composed of 4 different layers, including a sheet of weaved fibre-glass which helps stop static electricity and most importantly prevent wrinkles and waves. The screen fabric consists of a special material that helps prevent the loss of light, making it compatible with virtually every projector.

The fabrics are designed to be fire, water, and mold resistant and can be cleaned if required. The outside surface of the matte white screen has microdots that are made with PVC technology. This surface helps with creating the best possible reflection, whilst new advances in screen technology help keep our matte white screen flat and retain its shape and effectiveness over longer periods of time.

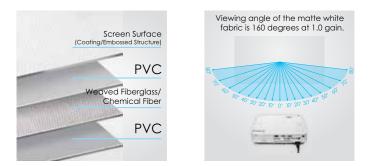

Electric



4:3 screen range

| Model | DE-3072EGA | DE-3100EGA | DE-3120EGA |
|----------------------------------|--|---|---|
| Format | 4:3 | 4:3 | 4:3 |
| Gain | 1 | 1 | 1 |
| Screen material | Glass-fibre, matte white | Glass-fibre, matte white | Glass-fibre, matte white |
| Viewing size (W x H) (mm) | 1460 x 1100 | 2030 x 1520 | 2400 x 1800 |
| Diagonal viewing (Inch) | 72 | 100 | 120 |
| Black border R & L (mm) | 30 | 50 | 50 |
| Black border bottom (mm) | 55 | 55 | 55 |
| Black border top (mm) | 80 | 80 | 80 |
| Weight (Net) (Kgs) | 9.2 | 12.5 | 14.8 |
| Case dimensions (W x D x H) (mm) | 1670 x 108 x 113 (including brackets) | 2280 x108 x 113 (including brackets) | 2650 x108 x 113 (including brackets) |

16:9 screen range

| Model | DE-9092EGA | DE-9106EGA | DE-9120EGA |
|----------------------------------|--|--|--|
| Format | 16:9 | 16:9 | 16:9 |
| Gain | 1 | 1 | 1 |
| Screen material | Glass-fibre, matte white | Glass-fibre, matte white | Glass-fibre, matte white |
| Viewing size (W x H) (mm) | 2030 x 1145 | 2340 x 1320 | 2656 x 1494 |
| Diagonal viewing (Inch) | 92 | 106 | 120 |
| Black border R & L (mm) | 50 | 50 | 50 |
| Black border bottom (mm) | 55 | 55 | 55 |
| Black border top (mm) | 300 | 300 | 300 |
| Weight (Net) (Kgs) | 12.27 | 14.2 | 16 |
| Case dimensions (W x D x H) (mm) | 2280 x 108 x 113 (including brackets) | 2661 x 108 x 113 (including brackets) | 2983 x 108 x 113 (including brackets) |

16:10 screen range

| Model | DE-1095EGA | DE-1109EGA | DE-1123EGA |
|----------------------------------|--------------------------|--------------------------|--------------------------|
| Format | 16:10 | 16:10 | 16:10 |
| Gain | 1 | 1 | 1 |
| Screen material | Glass-fibre, matte white | Glass-fibre, matte white | Glass-fibre, matte white |
| Viewing size (W x H) (mm) | 2030 x 1269 | 2340 x 1463 | 2656 x 1660 |
| Diagonal viewing (Inch) | 95 | 109 | 123 |
| Black border R & L (mm) | 50 | 47 | 50 |
| Black border bottom (mm) | 50 | 50 | 50 |
| Black border top (mm) | 300 | 300 | 300 |
| Weight (Net) (Kgs) | 12.27 | 14.2 | 16 |
| Case dimensions (W x D x H) (mm) | 2280 x 108 x 113 | 2590 x 108 x 113 | 2906 x 108 x 113 |

Optoma EGA is one of the only screens on the market that has built in IR Tubular motor remote control, tubular motor and multi functional mounting. The screen's The EGA's tubular motor ensures smooth and stable operation and years of aluminium casing has an override switch located at the end of the case and reliable and trouble-free use. The tubular motor has a quiet operation with depending upon how it is installed installation both either the built-in I/R or a noise level below 45dB. external infrared remote systems can be used to control it.

The EGA series screens offers a simple yet elegant design, with functionality the highest priority.



increasesing structural integrity making the screen sturdier and providing smoother operation. Innovative and simple installation make these screens suitable for most types of environments.



Optoma integrated control system

The Optoma integrated control system includes an in-line switch, built-in remote control system, 12v trigger, RS232 and external infrared receiver.

Tab tension





16:9 screen range

| Model | DE-9106ETT-B |
|----------------------------------|--|
| Format | 16:9 |
| Gain | 1 |
| Screen material | PS series flexible fabric, matte white |
| Viewing size (W x H) (mm) | 2346 x 1320 |
| Diagonal viewing (Inch) | 106 |
| Black border R & L (mm) | 80 |
| Black border bottom (mm) | 55 |
| Black border top (mm) | 400 |
| Weight (Net) (Kgs) | 18.4 |
| Case dimensions (W x D x H) (mm) | 2843 x 142 x 152 |

16:10 screen range

| Model | DE-1109ETT | DE-1123ETT |
|----------------------------------|--|--|
| Format | 16:10 | 16:10 |
| Gain | 1 | 1 |
| Screen material | PS series flexible fabric, matte white | PS series flexible fabric, matte white |
| Viewing size (W x H) (mm) | 2346 x 1466 | 2656 x 1660 |
| Diagonal viewing (Inch) | 109 | 123 |
| Black border R & L (mm) | 80 | 80 |
| Black border bottom (mm) | 55 | 55 |
| Black border top (mm) | 400 | 400 |
| Weight (Net) (Kgs) | 18.4 | 20.7 |
| Case dimensions (W x D x H) (mm) | 2843 x 142 x 152 | 3158 x 142 x 152 |

We know that improving our products is the best way to reduce our impact on the environment. That's why at Optoma, we design our products to have a long usable life, use fewer materials, ship with the minimum packaging and be free of all possible toxic substances. Naturally, energy efficiency and being recyclable are built in at the design stage. With each new product, we strive towards minimising our environmental impact. For full details of Optoma Project Green please visit our website.

Tap-tensions motorised screens

The ETT (Electric Tab Tension) has a unique tension adjustment system that keeps the screen surface tensioned at every point to ensure a picture perfect experience. This screen features PS HD flexible fabric with a unique layer of special diamond patterns on its surface specifically designed to bring out the best from a projector and enhance picture quality and colour. Also included is a 12volt trigger input, this allows the screen to be activated from any projector or AV control system with a 12volt output.

Screen image and adjustment image

Features aluminium casing with innovative sliding installation system, an integrated control system that allows the screen to be fully customizable and gives the user a variety of control options. Mounting Bracket and Casing.

Sliding installation system

Optoma Electric screens feature one of the best mounting systems on the market. Two small "L" shaped brackets fit to the wall or ceiling anywhere along the length of the case. Once the screen is clipped into the brackets an aluminium lever secures it in position. The aluminium white case has an elegant curved profile making it one of the nicest looking screens on the market. The rigid sturdy design keeps the internal roller perfectly straight and any motor noise to a minimum.



Built in Infra-red remote control and projector trigger





Manual pull up







4:3 screen range

| Model | DP-3072MWL | DP-3084MWL |
|----------------------------------|------------------|------------------|
| Format | 4:3 | 4:3 |
| Gain | 1 | 1 |
| Screen material | Matte white | Matte white |
| Viewing size (W x H) (mm) | 1463 x 1097 | 1707 x 1280 |
| Diagonal viewing (Inch) | 72 | 84 |
| Black border R & L (mm) | 35 | 35 |
| Black border bottom (mm) | 680 | 800 |
| Black border top (mm) | 25 | 25 |
| Weight (Net) (Kgs) | 5.63 | 6.33 |
| Case dimensions (W x D x H) (mm) | 1620 x 115 x 115 | 1867 x 115 x 115 |

16:9 screen range

| Model | DP-9046MWL |
|----------------------------------|-----------------|
| Format | 16:9 |
| Gain | 1 |
| Screen material | Matte white |
| Viewing size (W x H) (mm) | 1016 x 572 |
| Diagonal viewing (Inch) | 46 |
| Black border R & L (mm) | 25 |
| Black border bottom (mm) | 210 |
| Black border top (mm) | 20 |
| Weight (Net) (Kgs) | 2.8 |
| Case dimensions (W x D x H) (mm) | 1124 x 140 x 84 |

16:10 screen range

| Model | DP-1082MWL | DP-1095MWL |
|--|------------------|-----------------|
| Format | 16:10 | 16:10 |
| Gain | 1 | 1 |
| Screen material | Matte white | Matte white |
| Viewing size (W x H) (mm) | 1770 x 1106 | 2030 x 1267 |
| Diagonal viewing (Inch) | 82 | 95 |
| Black border R & L (mm) | 28 | 35 |
| Black border bottom (mm) | 907 | 698 |
| Black border top (mm) | 25 | 35 |
| Weight (Net) (Kgs) | 6.46 | 7.5 |
| Case dimensions ($W \times D \times H$) (mm) | 1930 x 115 x 155 | 2192 x 115x 155 |

This portable screen is simple to use and very stable produced using high quality alloy casing and a self standing format. The Optoma pull-up screen is ideal for travelling, whether from room to room or around the country.

Optoma MWL screens are available in a variety of formats; business presentation (4:3 / 16:10 ratios) and home cinema (16:9 ratio). These screens are ideal for rental companies when mounting a screen to a wall or ceiling is impractical.

Intelligent interlock

The design of the intelligent interlock ensures that the screen is fully secure in use and during transport. When the support bar is lifted, the case is automatically unlocked allowing the screen to be pulled up. When the screen is retracted the case will automatically be locked. This innovative safety feature is easy to use and standard on all sizes.





One-way interlock

The patented one-way lock allows the back support to be fully secure and easily adjustable. The multi-purpose handle is not only used for expanding and retracting the screen, but it is also used for securing the screen on the support bar. Its perfect fit prevents the screen from falling or shifting positions.



Level adjustment knob

During use, two support legs which are otherwise hidden conveniently slide out from under the casing. The support legs come with height adjustable floor stands for use on uneven surfaces. For additional vertical stability, the support bar comes with an additional height adjustable floor stand.



Fixed frame

16:9

16:9 screen range

| Model | ALR100 |
|---------------------------|-----------------|
| Format | 16:9 |
| Gain | 0.42 |
| Viewing size (W x H) (mm) | 2214 x 1245 |
| Diagonal viewing (Inch) | 100 |
| Fame size (mm) | 2236.2 x 1267.7 |
| Frame border (mm) | 16 |
| Weight (Net) (Kgs) | 12.4 |
| Screen size | 2326 x 1357 |

Ambient light projector screen


TV fans, gamers and those that love to watch sporting events or films will be thrilled with the Optoma ALR100 ambient light rejecting projector screen. This high performance front projection screen is designed for use with an ultra short throw projector to achieve vibrant images even in brightly lit rooms.

The specialised screen surface enables high contrast and solid colour Super-sized images can be enjoyed on the 100-inch fixed frame screen saturation for deeper black levels and vibrant colours - even with the any time of day. Its specialised screen surface is designed to actively lights on. reflect a projected image for high contrast and solid colour saturation while preventing ambient light from washing out the picture. Ambient light Ambient light rejecting technology rejecting technology - ensures vivid images even in brightly lit rooms

- High contrast and solid colour saturation for fine details in dark scenes and vibrant colours in brighter scenes
- 100-inch fixed frame for super-sized images
- 0.42 gain for superior viewing angles and deeper black levels

Neat solution for any living room

Designed for use with an ultra short throw projector, the ALR100 works perfectly with the Optoma GT5500 or GT5000 projectors. The ultra short lens will fill the huge 100-inch ALR100 screen size with the GT5500 or GT5000 projector placed just 30cm away.

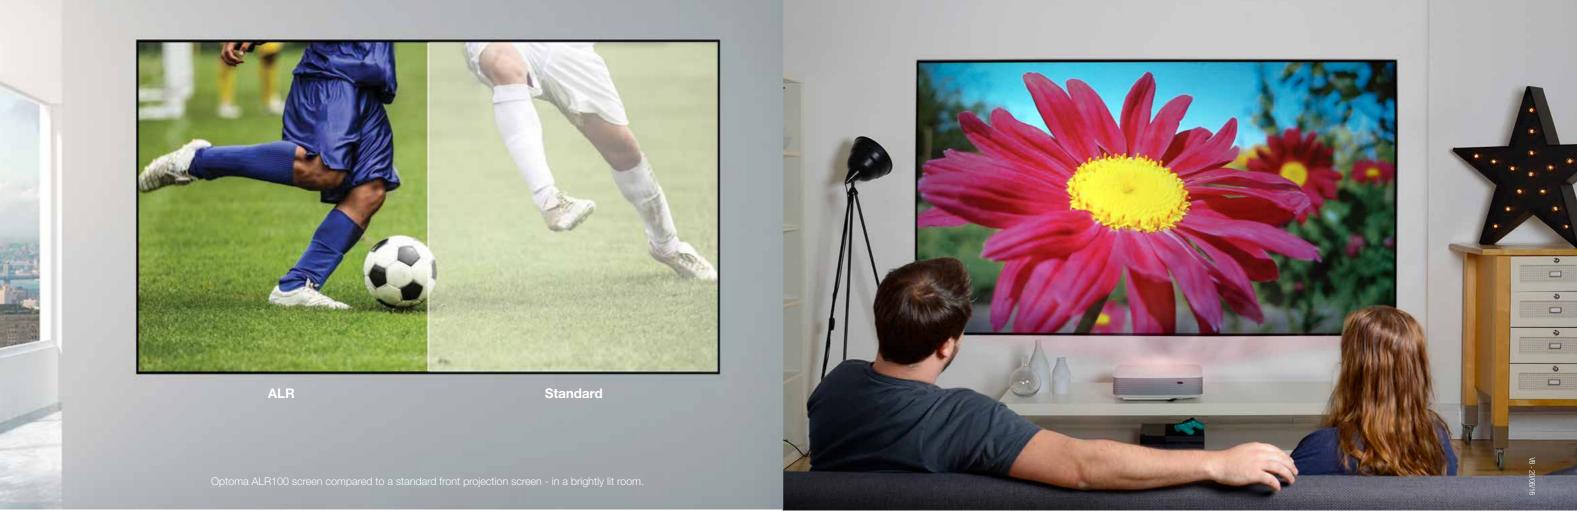

Stylish, modern look

The ALR100's narrow bezel delivers a stylish, modern look that will compliment any living space. Its 0.42 gain provides wide viewing angles from any seating position – perfect for gaming or watching the big game with family or friends.

Vibrant images even in brightly lit rooms

This high performance front projection screen is engineered to achieve vibrant images even in brightly lit rooms. The ALR100 captures light from an ultra short throw projector placed below the screen and rejects light that falls onto the screen from above.

Copyright © 2016, Optoma and its logo is a registered trademark of Optoma Corporation. Optoma Europe Ltd is the licensee of the registered trademark. All other product names and company names used herein are for identification purposes only and may be trademarks or registered trademarks of their respective owners. Errors and omissions excepted, all specifications are subject to change without notice. All images are for representation purposes only and may be simulated.



www.optoma.com