


Light Source Test Report

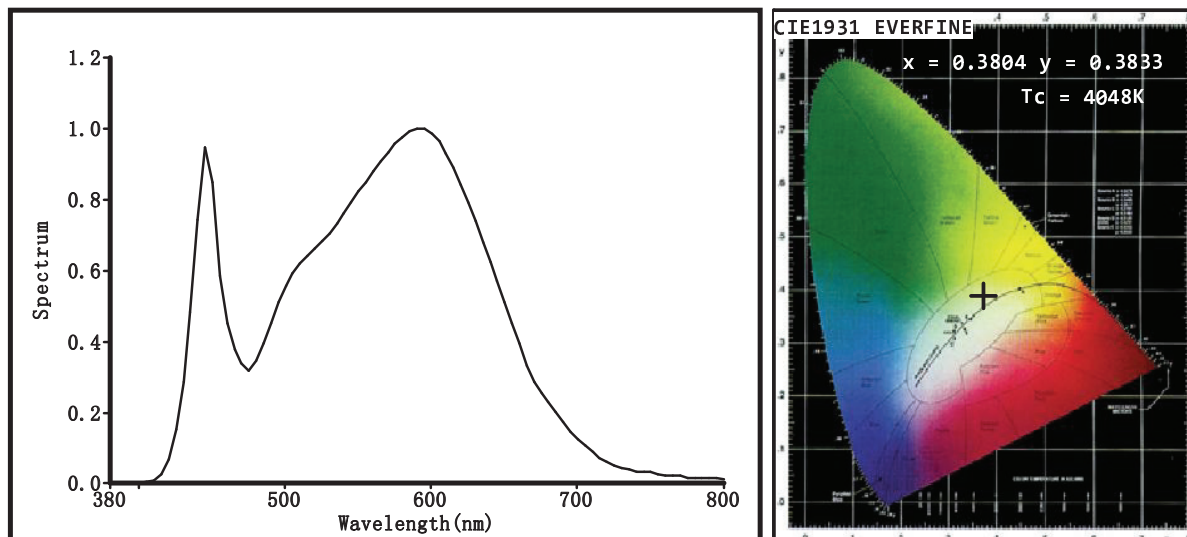

Color Parameters:

Chromaticity Coordinate: $x=0.3804$ $y=0.3833$

Chromaticity Coordinate: $u'=0.3804$ $v'=0.3833$ ($duv=3.04e-03$)

$T_c=4048K$ Dominant WL: $L_d=577.3nm$ Purity=29.2% Centroid WL: $568.0nm$

Ratio: R=19.2% G=77.4% B=3.4% Peak WL: $L_p=595.0nm$ HWL: $156.6nm$

Render Index: $R_a=82.3$

R1 =79 R2 =88 R3 =95 R4 =82 R5 =80 R6 =84 R7 =86

R8 =63 R9 =3 R10=72 R11=81 R12=69 R13=81 R14=98 R15=73

Photo Parameters:

Flux: 3976.5 lm Fe: 11.988 W Efficacy: 91.04 lm/W

Electrical Parameters:

Luminaire: U=219.8V I=0.2073A P=43.68W PF=0.9588

Instrument Status:

Scan Range: 380.0nm-800.0nm
REF=7983(R=3)

Interval: 5.0nm[0]
%=0.432%

$I_p=25016(G=4, D=56)$
PMT: 25.1 centigrade [150.0]

Product Type: 3012 22-34
Number: 08
Temperature: 25.3 deg
Test Operator: 系数1.16
Software: V2.00.100

Manufacturer:
Test Department:
Humidity: 65.0%
Test Date: 2014-11-26 13:57:26
Instrument: PMS-80_V1 (SN: 11020010)