


Light Source Test Report

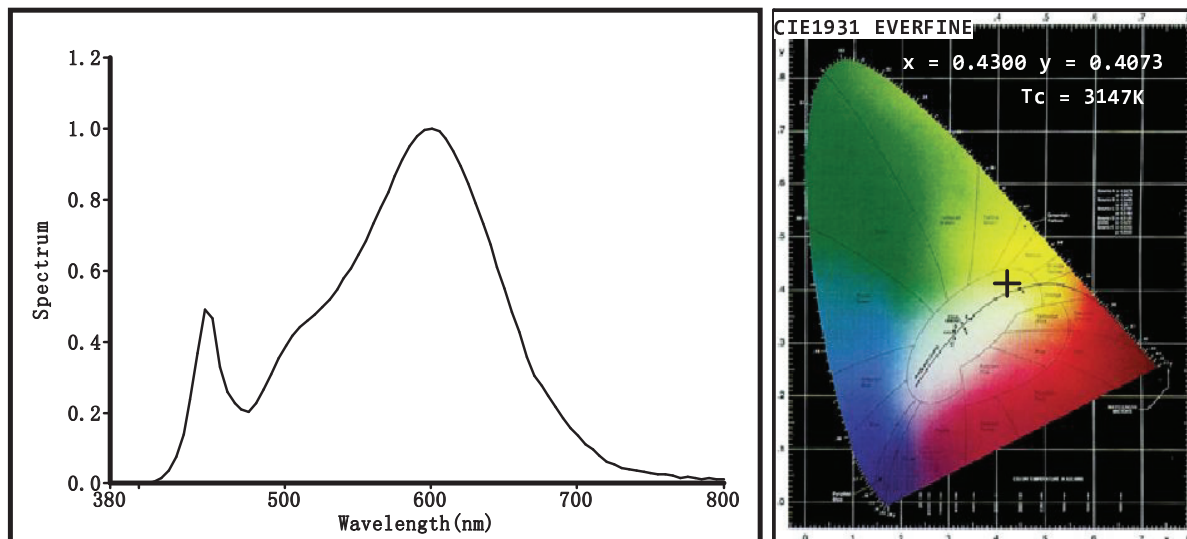

Color Parameters:

Chromaticity Coordinate: $x=0.4300$ $y=0.4073$

Chromaticity Coordinate: $u'=0.4300$ $v'=0.4073$ ($duv=2.33e-03$)

$T_c=3147K$ Dominant WL: $L_d=581.4nm$ Purity=51.3% Centroid WL: 585.0nm

Ratio: R=23.2% G=74.3% B=2.5% Peak WL: $L_p=600.0nm$ HWL: 128.0nm

Render Index: $R_a=81.0$

R1 =78 R2 =89 R3 =97 R4 =79 R5 =79 R6 =87 R7 =83

R8 =56 R9 =-3 R10=76 R11=78 R12=73 R13=80 R14=98 R15=70

Photo Parameters:

Flux: 3785.1 lm Fe: 11.213 W Efficacy: 86.88 lm/W

Electrical Parameters:

Luminaire: U=219.8V I=0.2067A P=43.57W PF=0.9588

Instrument Status:

Scan Range: 380.0nm-800.0nm
REF=7649(R=3)

Interval: 5.0nm[0]
%=-0.331%

$I_p=50435(G=5,D=60)$
PMT: 25.0 centigrade [150.0]

Product Type: 3012 22-24
Number: 07
Temperature: 25.3 deg
Test Operator: 系数1.16
Software: V2.00.100

Manufacturer:
Test Department:
Humidity: 65.0%
Test Date: 2014-11-26 13:47:04
Instrument: PMS-80_V1 (SN: 11020010)