


Light Source Test Report

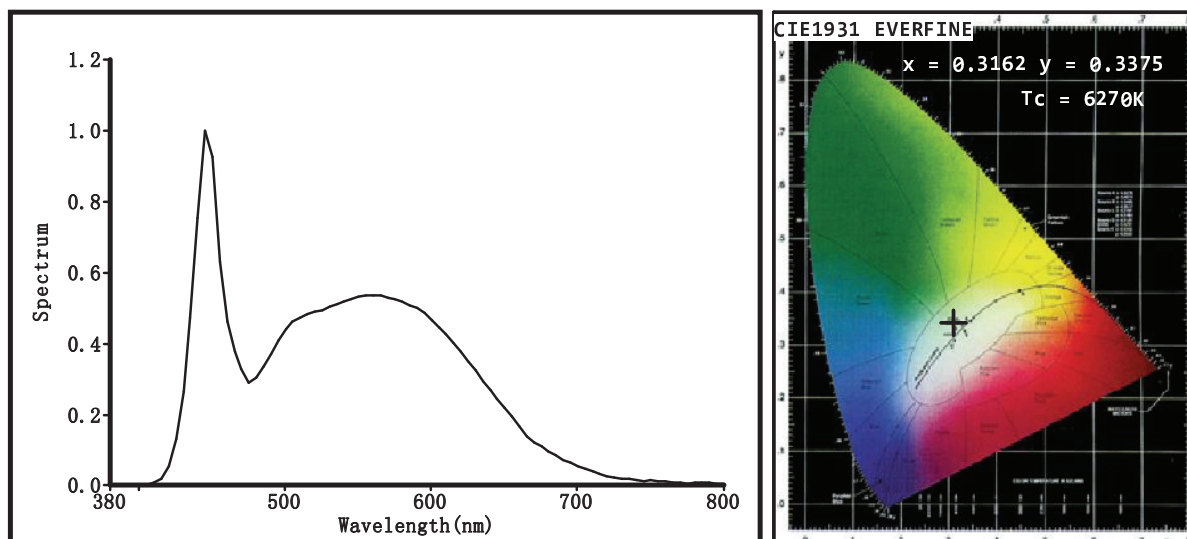

Color Parameters:

Chromaticity Coordinate: $x=0.3162$ $y=0.3375$

Chromaticity Coordinate: $u'=0.3162$ $v'=0.3375$ ($duv=5.78e-03$)

$T_c=6270K$ Dominant WL: $L_d=494.8nm$ Purity=5.6% Centroid WL: $540.0nm$

Ratio: R=14.6% G=80.3% B=5.1% Peak WL: $L_p=445.0nm$ HWL: $23.3nm$

Render Index: $R_a=83.2$

R1 =80 R2 =87 R3 =92 R4 =84 R5 =83 R6 =83 R7 =88

R8 =70 R9 =5 R10=69 R11=84 R12=68 R13=82 R14=96 R15=75

Photo Parameters:

Flux: 1673.4 lm Fe: 5.3848 W Efficacy: 85.63 lm/W

Electrical Parameters:

Luminaire: U= $219.9V$ I= $0.09405A$ P= $19.54W$ PF= 0.9448

Instrument Status:

Scan Range: $380.0nm-800.0nm$
REF=35041(R=4)

Interval: $5.0nm[0]$
%=- 0.120%

$I_p=19268(G=4,D=56)$
PMT: 25.8 centigrade [150.0]

铱宝铁壳0.6

Product Type:3060 22-11
Number:03
Temperature:25.3 deg
Test Operator:系数1.1
Software:V2.00.100

Manufacturer:
Test Department:
Humidity:65.0%
Test Date:2014-11-27 11:18:27
Instrument:PMS-80_V1 (SN:11020010)