


Light Source Test Report

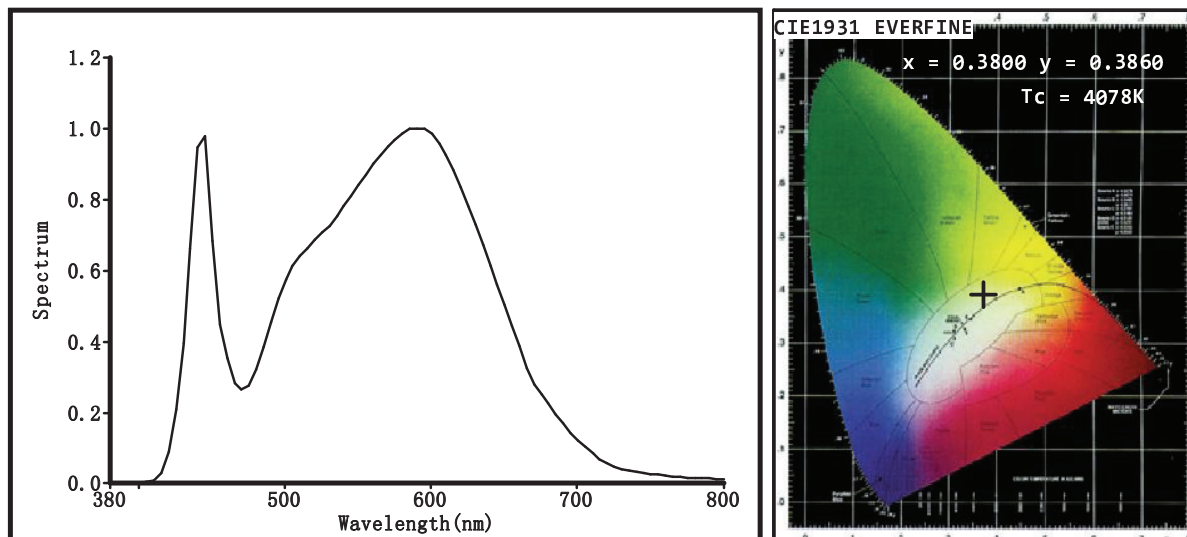

Color Parameters:

Chromaticity Coordinate: $x=0.3800$ $y=0.3860$

Chromaticity Coordinate: $u'=0.3800$ $v'=0.3860$ ($duv=4.44e-03$)

$T_c=4078K$ Dominant WL: $L_d=576.5nm$ Purity=29.9% Centroid WL: 567.0nm

Ratio: R=18.9% G=77.9% B=3.2% Peak WL: $L_p=585.0nm$ HWL: 156.7nm

Render Index: $R_a=81.0$

R1 =78 R2 =86 R3 =94 R4 =81 R5 =79 R6 =82 R7 =86

R8 =62 R9 =-2 R10=68 R11=81 R12=69 R13=79 R14=97 R15=70

Photo Parameters:

Flux: 5728.4 lm Fe: 17.128 W Efficacy: 94.99 lm/W

Electrical Parameters:

Luminaire: U=219.7V I=0.2840A P=60.31W PF=0.9666

Instrument Status:

Scan Range: 380.0nm-800.0nm
REF=10896(R=3)

Interval: 5.0nm[0]
%=-0.185%

$I_p=34525(G=4, D=55)$
PMT: 25.4 centigrade [150.0]

Product Type: 6012 22-32 4000K
Number: 02
Temperature: 25.3 deg
Test Operator: 系数1.22
Software: V2.00.100

Manufacturer:
Test Department:
Humidity: 65.0%
Test Date: 2014-11-25 18:01:57
Instrument: PMS-80_V1 (SN: 11020010)