


Light Source Test Report

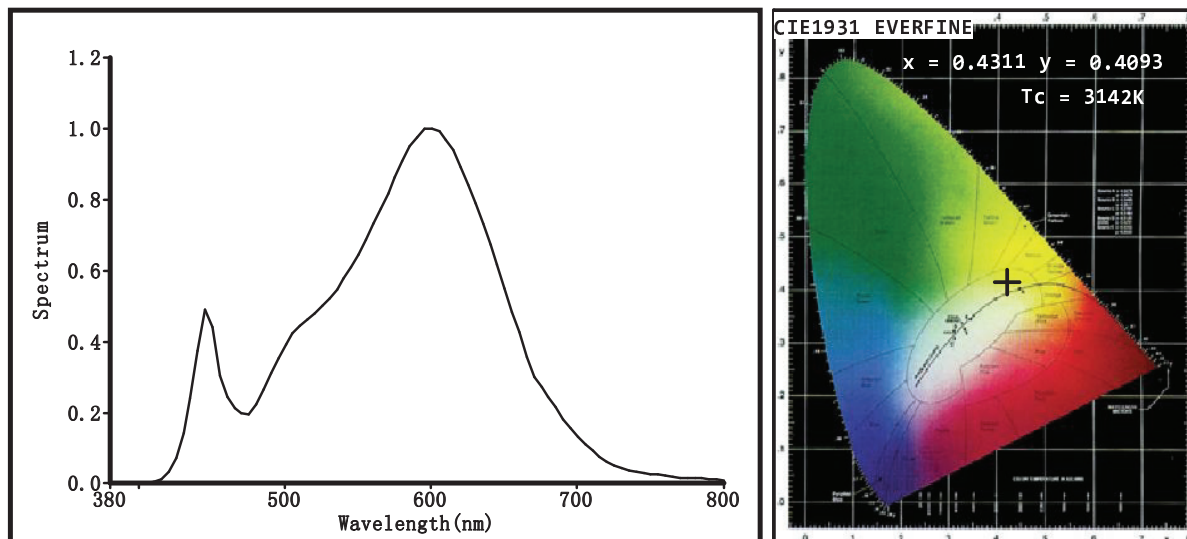

Color Parameters:

Chromaticity Coordinate: $x=0.4311$ $y=0.4093$

Chromaticity Coordinate: $u'=0.4311$ $v'=0.4093$ ($duv=2.94e-03$)

$T_c=3142K$ Dominant WL: $L_d=581.2nm$ Purity=52.3% Centroid WL: 585.0nm

Ratio: R=23.2% G=74.3% B=2.4% Peak WL: $L_p=600.0nm$ HWL: 128.4nm

Render Index: $R_a=81.0$

R1 =78 R2 =89 R3 =97 R4 =79 R5 =79 R6 =87 R7 =83

R8 =56 R9 =-3 R10=76 R11=78 R12=73 R13=80 R14=98 R15=70

Photo Parameters:

Flux: 5523.9 lm Fe: 16.282 W Efficacy: 92.98 lm/W

Electrical Parameters:

Luminaire: U=219.8V I=0.2798A P=59.41W PF=0.9661

Instrument Status:

Scan Range: 380.0nm-800.0nm
REF=10574(R=3)

Interval: 5.0nm[0]
%=-0.162%

$I_p=19810(G=4, D=56)$
PMT: 25.9 centigrade [150.0]

Product Type: 6012 22-22 3000K
Number: 01
Temperature: 25.3 deg
Test Operator: 系数1.22
Software: V2.00.100

Manufacturer:
Test Department:
Humidity: 65.0%
Test Date: 2014-11-25 16:54:43
Instrument: PMS-80_V1 (SN: 11020010)