


Light Source Test Report

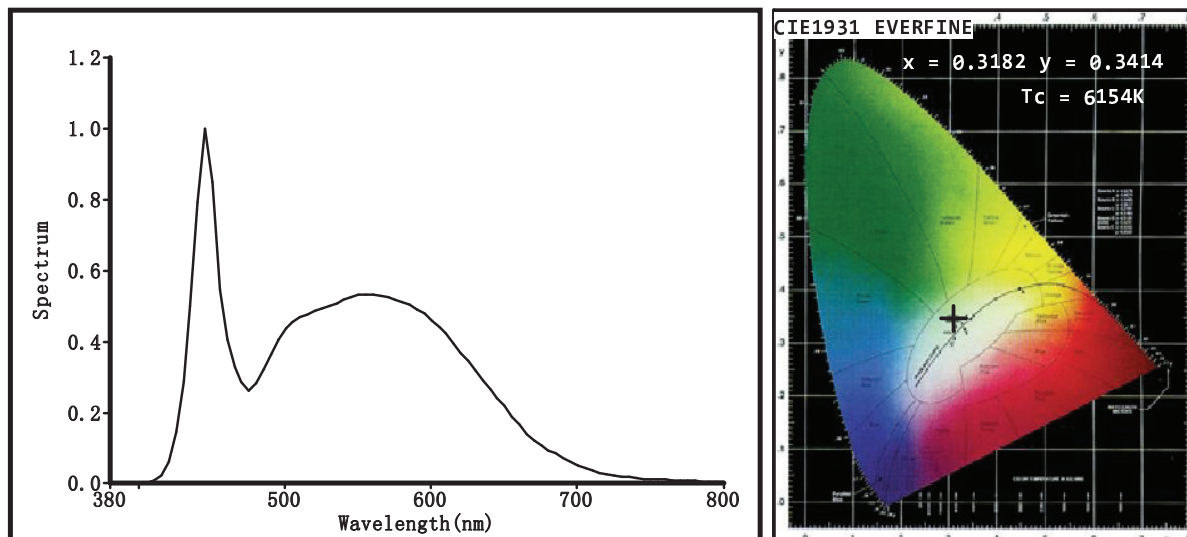

Color Parameters:

Chromaticity Coordinate: $x=0.3182$ $y=0.3414$

Chromaticity Coordinate: $u'=0.3182$ $v'=0.3414$ ($duv=6.75e-03$)

$T_c=6154K$ Dominant WL: $L_d=498.6nm$ Purity=4.7% Centroid WL: $541.0nm$

Ratio: R=14.5% G=80.5% B=4.9% Peak WL: $L_p=445.0nm$ HWL: $21.7nm$

Render Index: $R_a=82.2$

R1 =79 R2 =85 R3 =91 R4 =83 R5 =82 R6 =82 R7 =87

R8 =68 R9 =1 R10=67 R11=83 R12=68 R13=80 R14=95 R15=73

Photo Parameters:

Flux: 3156.4 lm Fe: 10.066 W Efficacy: 96.47 lm/W

Electrical Parameters:

Luminaire: U=219.9V I=0.1592A P=32.72W PF=0.9348

Instrument Status:

Scan Range: 380.0nm-800.0nm
REF=6251(R=3)

Interval: 5.0nm[0]
%=0.423%

$I_p=34622(G=4, D=55)$
PMT: 25.5 centigrade [150.0]

铱宝塑壳1.2

Product Type: 6060 22-15
Number: 04
Temperature: 25.3 deg
Test Operator: 系数1.16
Software: V2.00.100

Manufacturer:
Test Department:
Humidity: 65.0%
Test Date: 2014-11-26 16:14:00
Instrument: PMS-80_V1 (SN: 11020010)