


Light Source Test Report

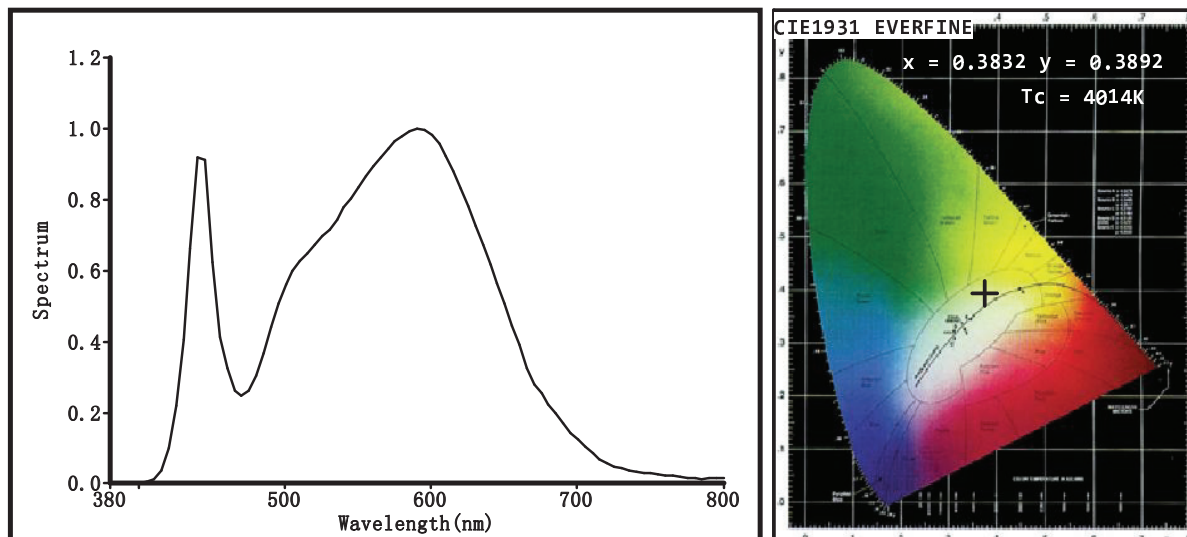

Color Parameters:

Chromaticity Coordinate: $x=0.3832$ $y=0.3892$

Chromaticity Coordinate: $u'=0.3832$ $v'=0.3892$ ($duv=4.91e-03$)

$T_c=4014K$ Dominant WL: $L_d=576.7nm$ Purity=31.8% Centroid WL: 568.0nm

Ratio: R=19.0% G=77.9% B=3.1% Peak WL: $L_p=590.0nm$ HWL: 155.8nm

Render Index: $R_a=80.6$

R1 =77 R2 =85 R3 =94 R4 =81 R5 =79 R6 =82 R7 =86

R8 =61 R9 =-4 R10=67 R11=80 R12=68 R13=79 R14=97 R15=70

Photo Parameters:

Flux: 3547.6 lm Fe: 10.566 W Efficacy: 96.72 lm/W

Electrical Parameters:

Luminaire: U=219.6V I=0.1766A P=36.68W PF=0.9458

Instrument Status:

Scan Range: 380.0nm-800.0nm
REF=7136(R=3)

Interval: 5.0nm[0]
%=-0.313%

$I_p=21151(G=4, D=55)$
PMT: 25.9 centigrade [150.0]

铱宝塑壳1.2

Product Type: 6060 22-31
Number: 11
Temperature: 25.3 deg
Test Operator: 系数1.16
Software: V2.00.100

Manufacturer:
Test Department:
Humidity: 65.0%
Test Date: 2014-11-26 16:46:46
Instrument: PMS-80_V1 (SN: 11020010)