

PCS045-120-1



LED driver



- Constant current
- Suitable for Optoma LED panels

Length x width x height	186 x 62 x 37.1mm
Case	Plastic
Weight	300g
Wire install	Pre-wired

- Independent LED driver
- Long life
- Class 2 power supply
- Fully isolated plastic case
- 100% full load burn-in test
- Universal AC input to 264Vac

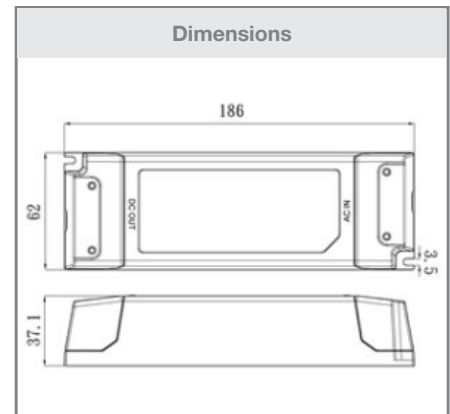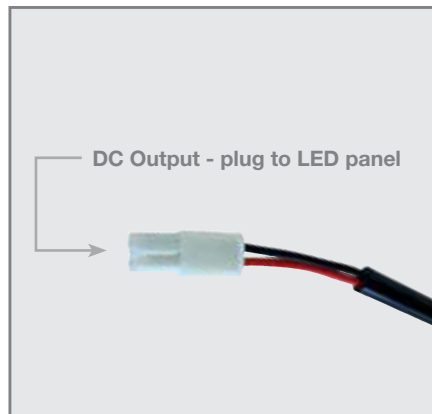

Model name / part number		LED driver: PCS045-120-1	
Power rating	45 watts		
AC input voltage	100VAC ~ 277VAC		
DC Output voltage	24V ~36V		
DC Output current	Constant current : 1200mA		
Tolerance	± 5%		
Inrush current	<70AMP –peak at full load and 25°C ambient cold start		
R&N (Vpeak – peak)	3V		
Efficiency	86%		
Protection	OPP / OVP / SCP auto - recovery		
Power Factor	0.9 +		
Supporting surface material	Plastic		
Class	SELV		
IP rating - panel only	IP20		
Typical ambient operating temperature	-20°C ~ +45°C		
Maximum operating temperature	45°C		
Lifetime	>43,000 hours		
Suitable for Optoma LED panels	FP6060 (WNC) 040 -1 FP3012 (WNC) 040 -1 FP6060 (WNC) 045 -1	FP3012 (WNC) 045 -1 FP6012 (WNC) 080 -1 (2 drivers)	
IP20 SELV			