


Light Source Test Report

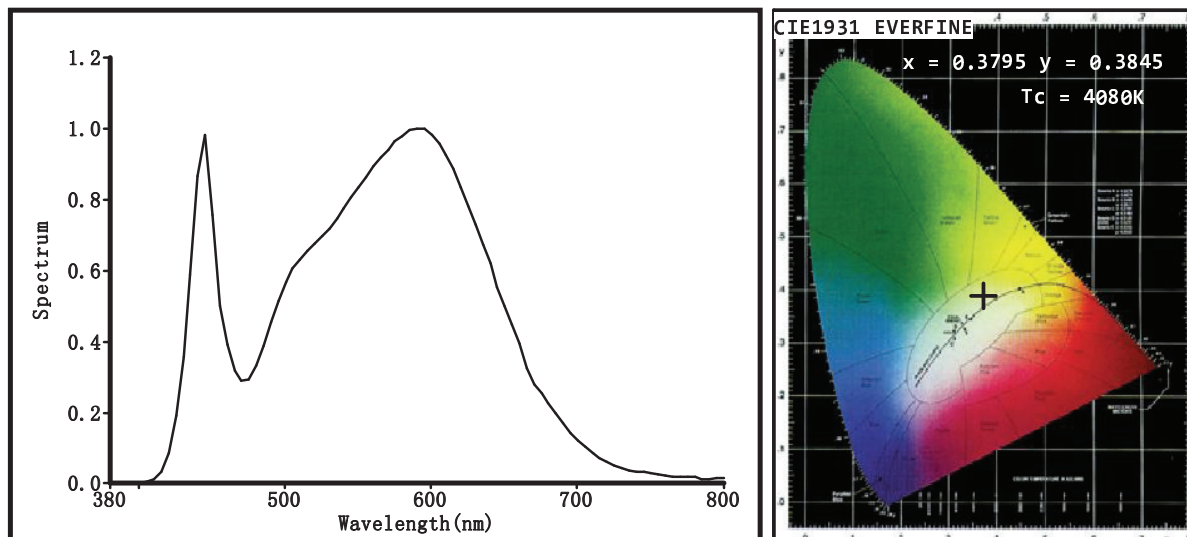

Color Parameters:

Chromaticity Coordinate: $x=0.3795$ $y=0.3845$

Chromaticity Coordinate: $u'=0.3795$ $v'=0.3845$ ($duv=3.87e-03$)

$T_c=4080K$ Dominant WL: $L_d=576.8nm$ Purity=29.3% Centroid WL: 567.0nm

Ratio: R=19.0% G=77.8% B=3.3% Peak WL: $L_p=590.0nm$ HWL: 156.3nm

Render Index: $R_a=81.5$

R1 =78 R2 =87 R3 =95 R4 =82 R5 =80 R6 =83 R7 =86

R8 =63 R9 =-0 R10=70 R11=81 R12=69 R13=80 R14=97 R15=71

Photo Parameters:

Flux: 3369.1 lm Fe: 10.118 W Efficacy: 87.51 lm/W

Electrical Parameters:

Luminaire: U=219.8V I=0.1843A P=38.50W PF=0.9503

Instrument Status:

Scan Range: 380.0nm-800.0nm
REF=6779(R=3)

Interval: 5.0nm[0]
%=-0.284%

$I_p=21586(G=4, D=55)$
PMT: 25.4 centigrade [150.0]

Product Type: 3012 22-31
Number: 01
Temperature: 25.3 deg
Test Operator: 系数1.16
Software: V2.00.100

Manufacturer:
Test Department:
Humidity: 65.0%
Test Date: 2014-11-25 19:13:34
Instrument: PMS-80_V1 (SN: 11020010)