


Light Source Test Report

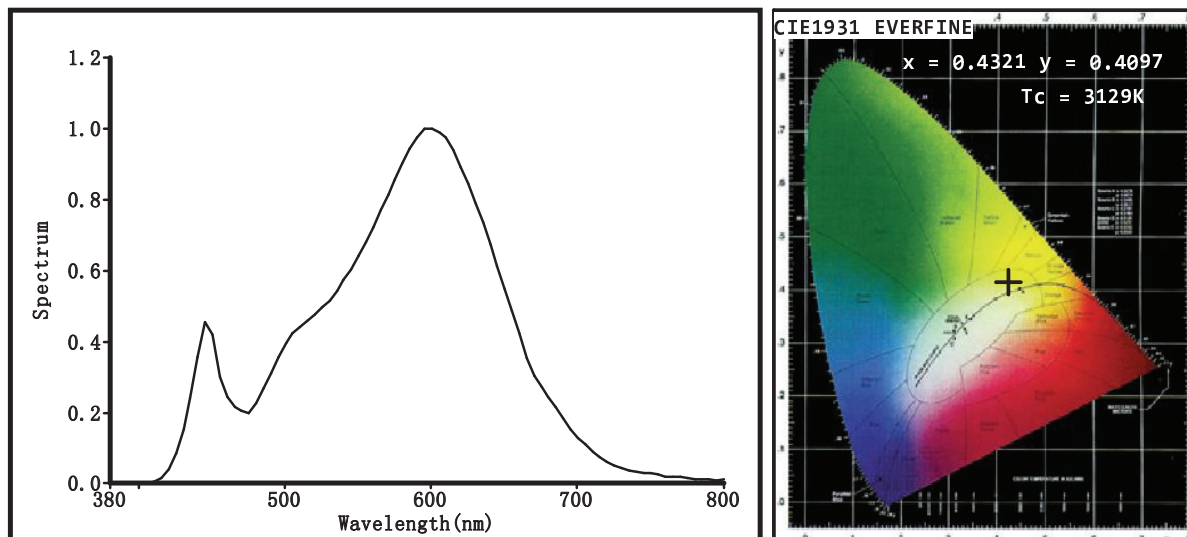

Color Parameters:

Chromaticity Coordinate: $x=0.4321$ $y=0.4097$

Chromaticity Coordinate: $u'=0.4321$ $v'=0.4097$ ($duv=2.95e-03$)

$T_c=3129K$ Dominant WL: $L_d=581.3nm$ Purity=52.7% Centroid WL: 585.0nm

Ratio: R=23.4% G=74.2% B=2.5% Peak WL: $L_p=600.0nm$ HWL: 127.8nm

Render Index: $R_a=81.2$

R1 =78 R2 =89 R3 =97 R4 =80 R5 =79 R6 =87 R7 =83

R8 =56 R9 =-3 R10=77 R11=79 R12=74 R13=81 R14=98 R15=70

Photo Parameters:

Flux: 3300.1 lm F_e : 9.7408 W Efficacy: 86.49 lm/W

Electrical Parameters:

Luminaire: U=219.8V I=0.1828A P=38.16W PF=0.9495

Instrument Status:

Scan Range: 380.0nm-800.0nm
REF=6683(R=3)

Interval: 5.0nm[0]
%=-0.545%

$I_p=41485(G=5, D=62)$
PMT: 25.6 centigrade [150.0]

Product Type: 3012 22-21
Number: 03
Temperature: 25.3 deg
Test Operator: 系数1.16
Software: V2.00.100

Manufacturer:
Test Department:
Humidity: 65.0%
Test Date: 2014-11-25 19:20:56
Instrument: PMS-80_V1 (SN: 11020010)