


Light Source Test Report

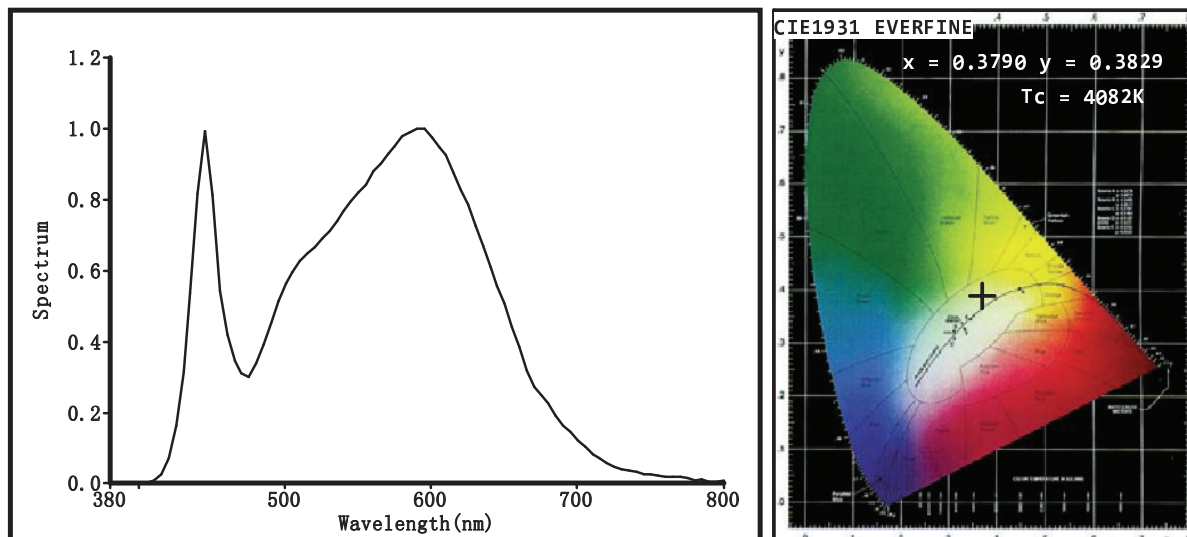

Color Parameters:

Chromaticity Coordinate: $x=0.3790$ $y=0.3829$

Chromaticity Coordinate: $u'=0.3790$ $v'=0.3829$ ($duv=3.28e-03$)

$T_c=4082K$ Dominant WL: $L_d=577.0nm$ Purity=28.7% Centroid WL: $567.0nm$

Ratio: R=19.0% G=77.6% B=3.4% Peak WL: $L_p=590.0nm$ HWL: $156.6nm$

Render Index: $R_a=82.0$

R1 =79 R2 =87 R3 =95 R4 =82 R5 =80 R6 =84 R7 =86

R8 =63 R9 =1 R10=71 R11=81 R12=69 R13=81 R14=97 R15=72

Photo Parameters:

Flux: 725.47 lm Fe: 2.1782 W Efficacy: 70.12 lm/W

Electrical Parameters:

Luminaire: U=219.8V I=0.05229A P=10.35W PF=0.9001

Instrument Status:

Scan Range: 380.0nm-800.0nm
REF=15961(R=4)

Interval: 5.0nm[0]
%=0.126%

$I_p=18169(G=5, D=60)$
PMT: 25.9 centigrade [150.0]

铱宝塑壳0.3

Product Type: 3030 22-31
Number: 04
Temperature: 25.3 deg
Test Operator: 系数1.06
Software: V2.00.100

Manufacturer:
Test Department:
Humidity: 65.0%
Test Date: 2014-11-27 13:40:36
Instrument: PMS-80_V1 (SN: 11020010)