


Light Source Test Report

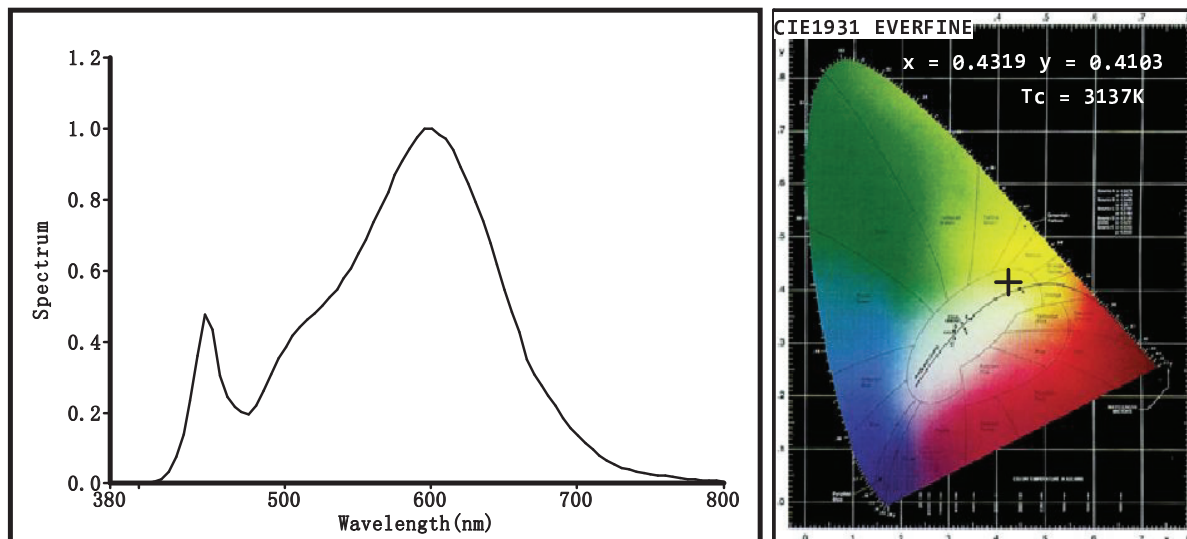

Color Parameters:

Chromaticity Coordinate: $x=0.4319$ $y=0.4103$

Chromaticity Coordinate: $u'=0.4319$ $v'=0.4103$ ($duv=3.21e-03$)

$T_c=3137K$ Dominant WL: $L_d=581.1nm$ Purity: 52.8% Centroid WL: 585.0nm

Ratio: R=23.2% G=74.4% B=2.4% Peak WL: $L_p=595.0nm$ HWL: 128.3nm

Render Index: $R_a=80.9$

R1 =78 R2 =89 R3 =97 R4 =79 R5 =79 R6 =87 R7 =83

R8 =56 R9 =-3 R10=75 R11=78 R12=72 R13=80 R14=99 R15=70

Photo Parameters:

Flux: 760.84 lm Fe: 2.2409 W Efficacy: 73.99 lm/W

Electrical Parameters:

Luminaire: U=219.8V I=0.05204A P=10.28W PF=0.8990

Instrument Status:

Scan Range: 380.0nm-800.0nm
REF=16840(R=4)

Interval: 5.0nm[0]
%=-0.161%

$I_p=46722(G=6, D=89)$
PMT: 25.6 centigrade [150.0]

铱宝塑壳0.3

Product Type: 3030 22-21
Number: 03
Temperature: 25.3 deg
Test Operator: 系数1.06
Software: V2.00.100

Manufacturer:
Test Department:
Humidity: 65.0%
Test Date: 2014-11-27 13:38:40
Instrument: PMS-80_V1 (SN: 11020010)