


Light Source Test Report

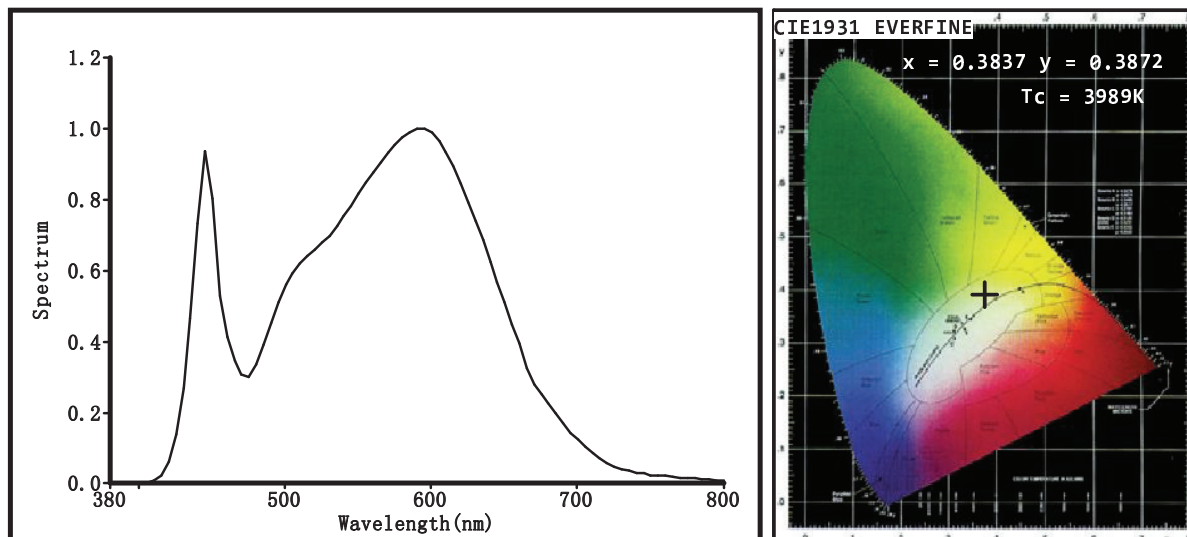

Color Parameters:

Chromaticity Coordinate: $x=0.3837$ $y=0.3872$

Chromaticity Coordinate: $u'=0.3837$ $v'=0.3872$ ($duv=3.88e-03$)

$T_c=3989K$ Dominant WL: $L_d=577.2nm$ Purity=31.4% Centroid WL: $569.0nm$

Ratio: R=19.4% G=77.3% B=3.3% Peak WL: $L_p=595.0nm$ HWL: $156.6nm$

Render Index: $R_a=82.1$

R1 =79 R2 =88 R3 =96 R4 =82 R5 =80 R6 =84 R7 =86

R8 =62 R9 =1 R10=72 R11=81 R12=69 R13=81 R14=98 R15=72

Photo Parameters:

Flux: 3135.3 lm Fe: 9.3689 W Efficacy: 94.59 lm/W

Electrical Parameters:

Luminaire: U=219.8V I=0.1610A P=33.15W PF=0.9365

Instrument Status:

Scan Range: 380.0nm-800.0nm
REF=6265(R=3)

Interval: 5.0nm[0]
%=-0.389%

$I_p=19408(G=4, D=56)$
PMT: 25.6 centigrade [150.0]

铱宝塑壳1.2

Product Type: 6060 22-35
Number: 06
Temperature: 25.3 deg
Test Operator: 系数1.16
Software: V2.00.100

Manufacturer:
Test Department:
Humidity: 65.0%
Test Date: 2014-11-26 16:19:33
Instrument: PMS-80_V1 (SN: 11020010)